



Anchor for medium-heavy loads in hollow and solid elements

INDEX

ZA-CA Shield



Assessments:




Material for use:

SOLID



Concrete



Reinforced
concrete



Stone



Solid brick



Hollow brick


Product Material / Covering:

Zinc-plated

PROFESSIONAL BOX

CODE	DIMENSIONS			EAN	PRICE
AZAMC06	M6 x 48 Ø12	100 pcs.	1200 pcs.	8423533024602	120,474
AZAMC08	M8 x 50 Ø14	100 pcs.	600 pcs.	8423533024701	148,491
AZAMC10	M10 x 58 Ø16	50 pcs.	300 pcs.	8423533024800	191,159
AZAMC12	M12 x 72 Ø20	25 pcs.	300 pcs.	8423533024909	306,611
AZAMC16	M16 x 107 Ø25	25 pcs.	150 pcs.	8423533025005	629,781

TECHNICAL INFORMATION

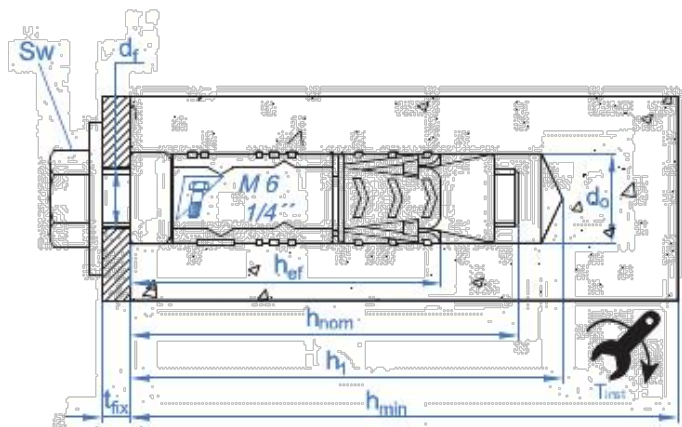

CODE	DIMENSIONS	Drill	Ø element to fix	Hole depth min.	Base material thickness	Min. anchor depth	Effective depth	Torque	Min. distance to edge	Min. distance from axis	Tension load non-cracked concrete	Shear load non-cracked concrete
AZAMC06	M6 x 48 Ø12	12	7	60	100	48	41	7	62	125	513	351
AZAMC08	M8 x 50 Ø14	14	9	65	100	50	43	15	65	130	561	640
AZAMC10	M10 x 58 Ø16	16	12	75	102	58	51	30	80	155	725	870
AZAMC12	M12 x 72 Ø20	20	14	90	122	72	61	50	95	185	865	1473
AZAMC16	M16 x 107 Ø25	25	18	125	192	107	96	120	145	290	1053	2744

CHARACTERISTICS



Zinc-plated




Zamak




Heavy loads


RECOMMENDED FOR



Air conditioning



Ceiling anchor



Trellis anchor



Aerial




Park bench



Handrails



Balcony handrail



Motorway railing

TECHNICAL DOCUMENTATION



DATA SHEET

<https://www.indexfix.com/docs/ft-azam-en.pdf>

*The data shown in this table are merely informative and do not constitute, in any case, contractual conditions of supply. The references contained in our catalog will be available until end of stock. Our prices do not included value added tax. This will be taxed according to current legislation for local and international transactions.